




Redefining the Large-Format Printer.

Up to 144 D
Prints/Hour*

LUCIA TD
Pigment Ink


Scan-to-Copy/File/
Share Solution Available

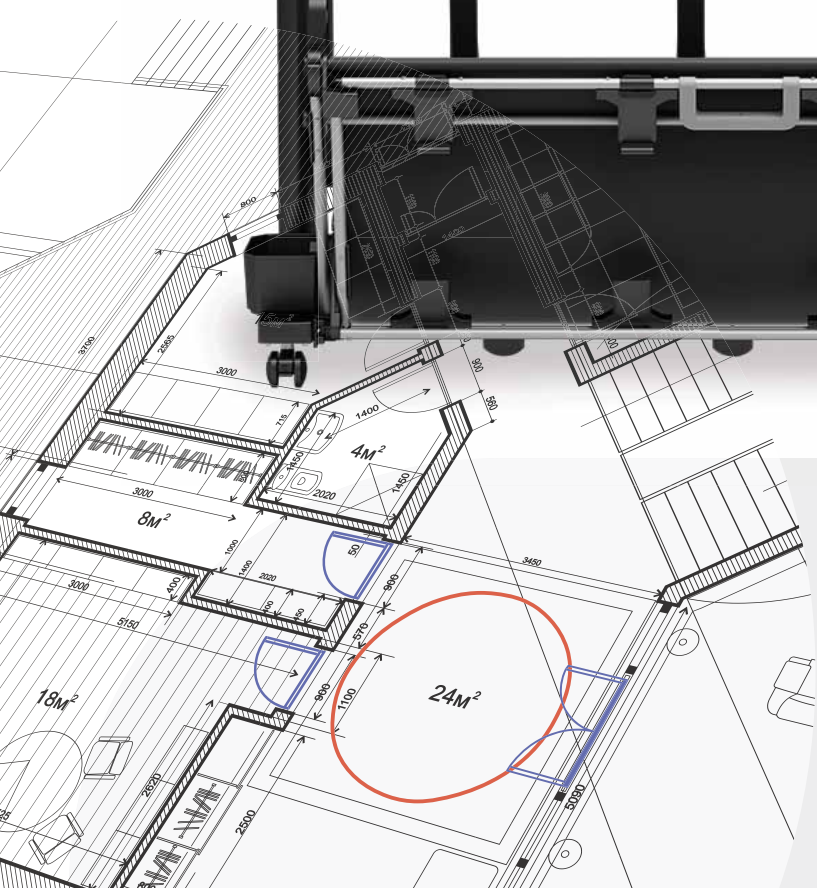

imagePROGRAF
TM Series

your printer doesn't have to.

144
D Prints
per hour*



Canon has redefined the capabilities of a large-format printer with the imagePROGRAF TM Series—all in an office-friendly printer that's up to **60% quieter** than previous imagePROGRAF printers.

LUCIA TD INK

The imagePROGRAF TM Series printers utilize the 5-color LUCIA TD Pigment ink system for water-resistant prints.

FAST PRINT SPEEDS

Faster printing of multipage files and sets than previous models.

DIRECT USB THUMB DRIVE PRINTING

Available with the TM-305 printer, PDF and JPEG files can be directly printed from the printer. You can preview the image on the operation panel prior to printing.

WI-FI®

SMALL FOOTPRINT

Sized to easily fit environments where space is limited.

SECURITY FEATURES

- Secure Disk Erase (Conforms to U.S. Department of Defense standard DoD5220.22-M)
- IPsec Support
- SSL/TLS
- 802.1x Authentication

TOUCH SCREEN OPERATION PANEL

Intuitive 3" color touch screen panel for simple device control.

- **PosterArtist Lite** - Create professional posters in four easy steps—now supports the creation of multilingual posters and tiling!
- **Easy-PhotoPrint Editor** - Simple solution for creating photo layouts, business cards, and calendars—both Windows® and Mac® compatible and mobile-friendly!
- **Free Layout Plus** - Nest, tile, and create custom layouts before printing your files with this print utility. Use the Plug-in feature to print directly from Microsoft® Office programs.


Scan-to-Copy/File/Share Systems

Add the ability to duplicate documents and archive old originals your changes quickly by emailing or saving to a common site.

- Scanning speed of up to 13 inches per second (monochrome) and up to 6 inches per second (color)

- Scan documents up
- Face-up front-loading

Lightweight Z36 Large-Format Scanner

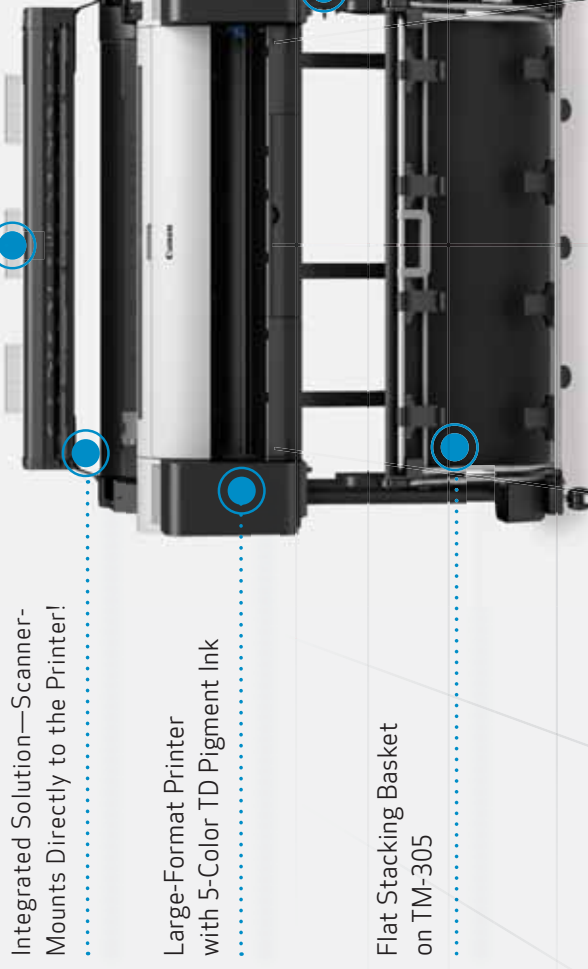

PRINTER SPECIFICATIONS (see usa.canon.com for full printer specs)

Print Head PF-06
Number of Nozzles Matte Black: 5,120 Nozzles Other Colors: 2,560 Nozzles per Color
Droplet Size 5 Picoliter
Ink Type Pigment: Matte Black (MBK), Cyan (C), Magenta (M), Yellow (Y), Black (BK)
Ink Tank Shipped with Printer: MBK (130 ml) BK, C, M, Y (90 ml) Replacement: PFI-120 (130 ml), PFI-320 (300 ml)
Printer RAM TM-305: 128 GB (2 GB Physical Memory) TM-200/300: 2 GB
Hard Drive TM-305: 500 GB
Media Feed Roll Feed: One Roll, Front-loading, Front Output Cut Sheet: Top-loading, Front Output
Media Width TM-305/300 Roll Feed: 8"-36" (203 mm – 914 mm) Cut Sheet: 8"-36" (203 mm – 914 mm) TM-200 Roll Feed: 8"-24" (203 mm – 610 mm) Cut Sheet: 8"-24" (203 mm – 610 mm)
Media Cutter Durable Dual-Blade Rotary Cutter
Media Thickness 0.07 mm – 0.8 mm
Media Core Sizes 2" and 3" Core (Adapter Included)
Maximum Roll Outer Diameter 5.9" (150 mm)
Media Output Options TM-305: Flat Stacking Basket (standard) TM-300/200: Basket (standard)
Printing Software Utilities Accounting Manager, Canon Print Service, Device Management Console, Direct Print Plus, Free Layout Plus, imagePROGRAF Printer Driver for Windows®/Mac®, Media Configuration Tool, PosterArtist Lite for Windows, Canon PRINT Inkjet Selphy, Easy-Photo PrintEditor, Optimized Driver for AutoCAD®
Operating System Windows 7 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows Server 2008 R2, (32/64 bit), Windows Server 2012 (64 bit), Windows Server 2012 R2 (64 bit), Windows Server 2016 (64 bit), Macintosh OS X v10.10.5-v10.12x
Interface TM-305: Standard (Built-in): USB 2.0 Hi-Speed, 10/100/1000Base-T/TX, Wireless LAN (IEEE 802.11 b/g/n)■ Direct USB Thumb Drive TM-300/200: Standard (Built-in): USB 2.0 Hi-Speed, 10/100/1000Base-T/TX, Wireless LAN (IEEE 802.11 b/g/n)■

Power Supply AC 100 – 240V (50 – 60 Hz)
Power Consumption Maximum: 69 W or Less Standby: 3.6 W or Less Power Off: 0.3 W or Less (Executive Order Compliant)
Certifications Environmental Certifications ENERGY STAR® (Worldwide)
Operational Environment Temperature: 59° F – 86° F (15° C – 30° C) Relative Humidity: 10 – 80% (No Condensation)
Printer Dimensions (H x W x D) and Weight (With Basket Open) TM-305: 42" x 51" x 35"; Approx 134 lb. TM-300: 42" x 51" x 34"; Approx 130 lb. TM-200: 42" x 38" x 34"; Approx 112 lb.
Package Dimensions (H x W x D) and Weight (With Stand, Basket, and Pallet) TM-305: 38" x 58" x 36"; Approx. 231 lb. TM-300: 38" x 58" x 36"; Approx. 229 lb. TM-200: 38" x 45" x 36"; Approx. 187 lb.
Options TM-200: 2"/3" Roll Holder Set (RH2-28) TM-305/300: 2"/3" Roll Holder Set (RH2-35); PosterArtist User-Replaceable Items • Ink Tank (PFI-120/PFI-320) • Print Head (PF-06) • Maintenance Cartridge (MC-31) • Cutter Blade (CT-08)

What's In The Box
Printer, Basket, Stand, 2"/3" Core Media Spool (Adapters Included), Power Cord, Tools and Screws, Print Head, Maintenance Cartridge (Installed), 5 Ink Tanks (130 ml: MBK, 90 ml: BK/C/M/Y), Sample Heavyweight Coated Paper (A2/2 Sheets), Ethernet Card (built-in), USB 2.0 High-speed Interface, USB Connection Sheet, iWR Service Terms Leaflet, User Manual, Quick Setup Guide, User Software CD for Windows (Printer Driver Utilities), PosterArtist Lite CD, User Registration Card

Z36 SCANNER

Scan Speed** • 24-bit Color @ 200 dpi: 3" (Per Second) • 8-bit Grayscale and Monochrome @ 200 dpi: 13" (Per Second)
Scan Modes • 16.7 Million Color RGB (24-bit) • 256-level Grayscale (8-bit) • Black and White (1-bit)
Color Space sRGB
Maximum Resolution 1200 dpi (Optical)
Scan Accuracy▲ +/- 0.1% : +/- 1 pixel
Maximum Scan Width 36"
Maximum Media Width 38"

Maximum Scan Length 315" (JPEG/PDF); 598" (TIFF)
Maximum Media Thickness 0.003" – 0.04" (0.07 mm – 1.0 mm)
Digital Imaging Technology Contact Image Sensor (CIS) Technology (SingleSensor Assembly) • 24-bit RGB digital color image capture • 16-bit grayscale image capture • Panchromatic monochrome and black and white • Bi-directional extra long-life LED light system for optimum object illumination and instant-on scanning capability
Included Software SmartWorks MFP Scan-to-Copy/File/Email with Real-time Image Viewer; supports TIFF, JPEG, TIFF G4, and PDF
Operating System Windows 10 LTSC
Scanner Interface Kit Superspeed USB 3.0 (PC Connector Compatible with USB 2.0 and USB 3.0 sockets)
Operating Environment 10° C – 35° C, 35 – 80% RH, Non-condensing
External Power Supply 100 – 240 VAC Autosensing +/- 10%, 50 – 60 Hz
Scanner Power Consumption Sleep/Idle: 0.2 W/12.4 W Scanning Color/Grayscale @ 200 dpi: 22.7 W/23.3 W
Compliance ENERGY STAR®, CB (62368-1), CE, FCC (EMC), CuI/UL, CCC, NOM-019, EAC, C-TICK, VCCI, BIS, EMC +LOA, UL AR, WEEE, REACH, RoHS, EU—Tier 3 of Lot 6
Scanner Dimensions (H x W x D) 7" x 42" x 10"
Scanner Weight 17.3 lb. (Approx.)
What's In The Box? • Z36 Scanner with Power Cord, USB 3.0 Cable (2 meter) • 15.6" System Controller • 3:1 Trident Power Cord • Power Supply • Mount for Printer and System Controller • 2 Paper Edge Guides • Document Return Guides • Calibration Target • Assembly and Startup Guide
■ Wireless printing requires a working network with wireless 802.11b/g or 802.11n capability. Wireless performance may vary based on terrain and distance between the printer and wireless network clients.
■ The scan rate is proportional across the full range of resolutions supported by the scanner. Actual scan times will depend on the host system performance. Quoted top speeds may be limited by the effective bandwidth of the USB 2 and is not guaranteed for all media types.
Note: Model shown on cover is the TM-305 MFP Z36. The imagePROGRAF TM-305 MFP Z36 system contains multiple components, some of which are manufactured by third parties. To the extent that such third-party offerings come with limited warranties, those such limited warranties are hereby passed to the purchaser, and Canon shall have no obligation.

 imagePROGRAFplotter.com



Canon products offer certain security features, yet many variables can impact the security of your devices and data. Canon does not warrant that use of its features will prevent security issues. Nothing herein should be construed as legal or regulatory advice concerning applicable laws; customers must have their own qualified counsel determine the feasibility of a solution as it relates to regulatory and statutory compliance. Some security features may impact functionality/performance; you may want to test these settings in your environment.

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has qualified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. Canon and imagePROGRAF are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. Wi-Fi is a registered trademark of the Wi-Fi alliance. All other referenced product names and marks are trademarks of their respective owners. All printer output and screen images are simulated. Specifications and availability subject to change without notice. Not responsible for typographical errors. ©2021 Canon U.S.A., Inc. All rights reserved. 0521-TMZ36-Bro-PDF-IH

Canon



1-800-292-4203

www.commbblue.com

Commercial Blueprint, Inc.
3125 Pine Tree Road
Suite B
Lansing, Michigan 48911