




The Fastest imagePROGRAF. Ever.

Up to 4 D Prints/Minute*
Up to 244 D Prints/Hour**

Integrated 100-Print
Capacity Top Stacker

Dual-Roll Intelligent Media-Handling System
that Detects Media Type, Width, and Length

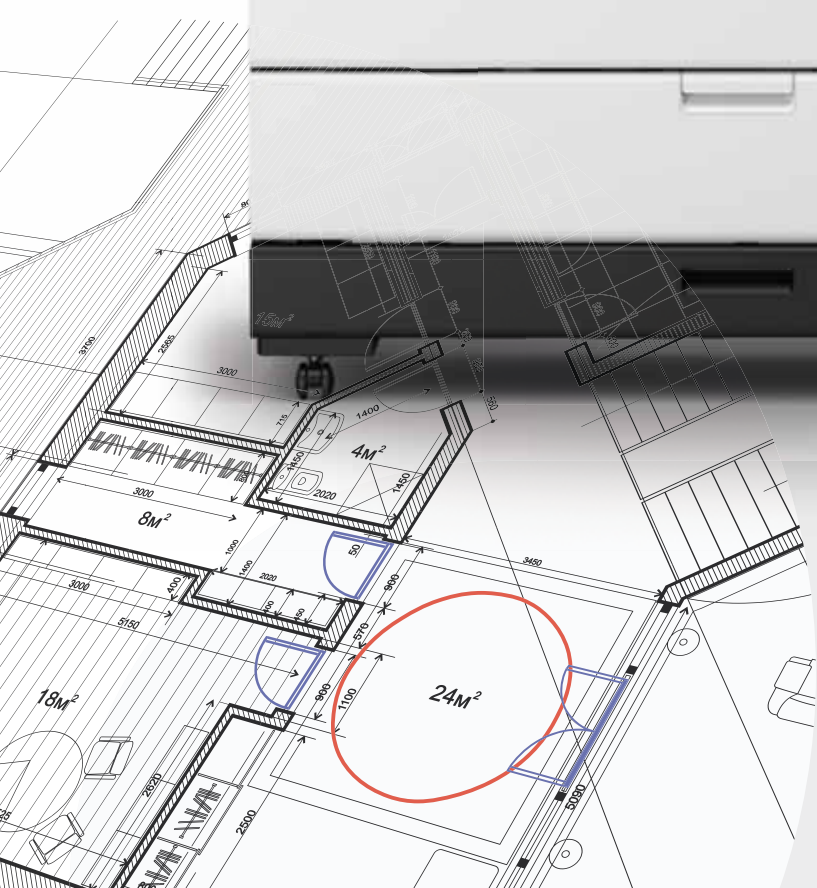

imagePROGRAF

TZ Series

Print with more confidence knowing Canon security features and technology are on the



STORAGE

The hard drive is self-encrypting with AES 256 technology and multiple levels of file and data erasure. Completely erase all files at the touch of a button.



INTERFACE

- Ability to disable:
- USB Direct Thumb Drive
 - USB Port
 - Ethernet Port



COMMUNICATIONS

IPSec, 802.1x.com and TLS-enabled/encryption capabilities



Up to
244
D Prints
per hour**

EFFICIENT

...e a
...Canon's
...les for
...g, batch
...of more
...ntages

...ility to
...s. You can
...or the
...cludes:

...ings
...n

The **Top Output Stacker** allows for up to 100 ARCHE sheets to be stacked facedown for confidentiality. The stacker features Canon's advanced air flow system, which reduces paper jams and keeps prints neatly aligned.

For continuous production printing, the imagePROGRAF TZ Series lets you load a second roll of media while the other roll is printing. Additionally, **Hot Swap Ink Tanks** allow you to change ink while printing, without damaging or stopping the print—Virtually no down time! **These are the only printers in the industry that can do this!**

The **Intelligent Media Handling** feature allows the user to simply place a roll in the opened drawer and slide in the media from the front of the printer with ease. The printer automatically detects media type, width, and length, for simplified user handling.

The imagePROGRAF TZ ships standard with a **Dual Roll** for



PRINTER SPECIFICATIONS

Print Head

PF-06

Number of Nozzles

Matte Black: 5,120 Nozzles

Other Colors: 2,560 Nozzles/Color

Droplet Size

5 Picoliter

Ink Type

Pigment: Matte Black (MBK), Cyan (C), Magenta (M), Yellow (Y), Black (BK)

Printer RAM

128 GB (2 GB Physical Memory)

Hard Drive

500 GB (Encrypted)

Media Feed

Roll Feed: Two Rolls, Front Loading

Cut Sheet: Front Loading

Media Width

Roll Feed: 8" - 36" (203 mm - 914 mm)

Cut Sheet: 8" - 36" (203 mm - 914 mm)

Media Cutter

Durable Dual-Blade Rotary Cutter

Media Thickness

0.07 mm - 0.8 mm

Media Core Sizes

2" and 3" Core Adapters Included

Maximum Roll Outer Diameter

6.9" or Less

Media Output

Front Output: Basket

Top Output: Top Delivery Tray

Printing Software Utilities

Accounting Manager, Canon Print Service, Device Management Console, Direct Print Plus, Free Layout Plus, Media Configuration Tool, PosterArtist Lite for Windows, PosterArtist (optional purchase), CPP Publisher Select, Canon Printer Driver, CPP Driver Select, Optimized Driver for AutoCAD, Printer Driver Extra Kit

Operating System

Windows® 7 (32/64-bit), Windows 8.1 (32/64-bit), Windows 10 (32/64-bit), Windows Server 2008 R2, (32/64 bit), Windows Server 2012 (64-bit), Windows Server 2016 (64-bit), Macintosh® OS 10.12.6 and later

Power Supply

AC 100 - 240V (50 - 60 Hz)

Power Consumption

Maximum: 68 W or Less

Standby: 3.6 W or Less

Power Off: 0.3 W or Less (Executive Order Compliant)

Certifications

International ENERGY STAR® Program (WW), TUV, CB, EPEAT

Operational Environment

Temperature: 59° F - 86° F (15°C - 30° C)

Relative Humidity: 10 - 80% (No Condensation)

Interface

USB B Port

Type: Built-in (Hi-speed USB)

Mode: Full Speed (12-Mbit/sec.), High Speed (480-Mbit/sec.), Bulk Transfer
Connector Type: Series B (4 Pins)

USB A Port: USB Memory (Direct Print)

Gigabit Ethernet

Type: Built-in

Standard: IEEE 802.3u 100Base-TX/Auto-Negotiation
IEEE 802.3ab 1000Base-T/Auto-Negotiation
IEEE 802.3x Full Duplex

Protocol: SNMP, HTTP, TCP/IP (IPv4/IPv6), FTP

Wireless LAN[■]

Standard: IEEE802.11n/IEEE802.11g/IEEE802.11b

Security: WEP (64/128-bit)

WPA-PSK (TKIP/AES)

WPA2-PSK (TKIP/AES)

Printer Dimensions (H x W x D) and Weight

TZ-30000: 47" x 61" x 38"; 456 lb. (Approx.)

TZ-30000 MFP Z36: 51" x 63" x 38"; 478 lb. (Approx.)

Package Dimensions (H x W x D) and Weight

TZ-30000: 54" x 67" x 37"; 604 lb. (Approx.)

Z36 Scanner: 45" x 17" x 15"; 46 lb. (Approx.)

Options

2"/3" Roll Holder Set (RH2-34)

PosterArtist

User-Replaceable Items

• Ink Tank (PFI-340/PFI-740)

• Print Head (PF-06)

• Maintenance Cartridge (MC-30)

What's In The Box

Printer, Top Output Stacker, Basket, 2"/3" Core Media Spool (Adapters Included), Power Cord, Tools and Screws, Print Head, Maintenance Cartridge (Installed), 5 Ink Tanks (330 ml MBK, 160 ml: BK/C/M/Y), Ethernet Card (built-in), USB 2.0 High-speed Interface, USB Connection Sheet, iWR Service Terms Leaflet, User Manual, Quick Setup Guide, User Software CD for Windows (Printer Drive Utilities), PosterArtist Lite CD, User Registration Card, Warranty Statement

Z36 SCANNER

Scan Speed[■]

• 24-bit Color @ 200 dpi: 3" (Per Second)

• 8-bit Grayscale and Monochrome @ 200 dpi:
13" (Per Second)

Copy Speed

24-bit Color @ 200 dpi: 6" (Per Second)

Scan Modes

• 16.7 Million Color RGB (24-bit)

• 256-level Grayscale (8-bit)

• Black and White (1-bit)

Color Space

sRGB

Maximum Resolution

1200 dpi (Optical)

Scan Accuracy[▲]

+/- 0.1% : +/- 1 pixel

Maximum Scan Width

36"

Maximum Media Width

38"

Maximum Scan Length

315" (JPEG/PDF); 598" (TIFF)

Maximum Media Thickness

0.003" - 0.04" (0.07 mm - 1.0 mm)

Digital Imaging Technology

Contact Image Sensor (CIS) Technology
(SingleSensor Assembly)

Included Software

SmartWorks MFP Scan-to-Copy/File/Email with Real-time Image Viewer; Supports TIFF, JPEG, TIFF G4, and PDF

Operating System

Windows 10 LTSC

Scanner Interface Kit

Superspeed USB 3.0 (PC Connector Compatible with USB 2.0 and USB 3.0 Sockets)

Operating Environment

10° C - 35° C, 35 - 80% RH, Non-condensing

External Power Supply

100 - 240 VAC Autosensing +/- 10%, 50 - 60 Hz

Scanner Power Consumption

Sleep: 0.2 W

Idle: 12.4 W

Scanning Color/Grayscale @ 200 dpi: 22.7 W/23.3 W

Compliance

ENERGY STAR®, CB(62368-1), CE, FCC (EMC), Cu/UL, CCC, NOM-019, EAC, C-TICK, VCCI, BIS, EMC +LOA, UL AR, WEEE, REACH, RoHS, EU — Tier 3 of Lot 6

Scanner Dimensions (H x W x D)

6.1" x 41.6" x 9.9"

Scanner Weight

17.3 lb. (Approx.)

What's In The Box?

• Z36 Scanner with Power Cord, USB 3.0 Cable (2 m)

• 15.6" System Controller

• 3:1 Trident Power Cord

• Power Supply

• Mount for Printer and System Controller

• (2) Paper Edge Guides

• (3) Document Return Guides

• Calibration Target

• Assembly and Startup Guide

■ Wireless printing requires a working network with wireless 802.11n/g or 802.11n capability. Wireless performance may vary based on terrain and distance between the printer and wireless network clients.

■ The scan rate is proportional across the full range of resolutions supported by the scanner. Actual scan times will depend on the host system performance. Quoted top speeds may be limited by the effective bandwidth of the USB 2 and is not guaranteed for all media types.

▲ The quoted scan accuracy may vary depending on the operating environment and the thickness of the media.

Note: Model shown on cover is the TZ-30000 MFP Z36. The imagePROGRAF TZ MFP Z36 system contains multiple components, some of which are manufactured by third parties. To the extent that such third-party offerings come with limited warranties, those such limited warranties are hereby passed to the purchaser, and Canon shall have no obligation.

usa.canon.com/imagePROGRAF

Canon

CBLUE
COMMERCIAL BLUEPRINT, INC.



Canon and imagePROGRAF are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. All other referenced product names and marks are trademarks of their respective owners. All printer output and screen images are simulated. Specifications and availability subject to change without notice. Not responsible for typographical errors.

©2021 Canon U.S.A., Inc. All rights reserved.
0321R1-TZ-PDF-IH

1-800-292-4203

www.commbblue.com

Commercial Blueprint, Inc.
3125 Pine Tree Road
Suite B
Lansing, Michigan 48911